



50% Open Facade Mesh

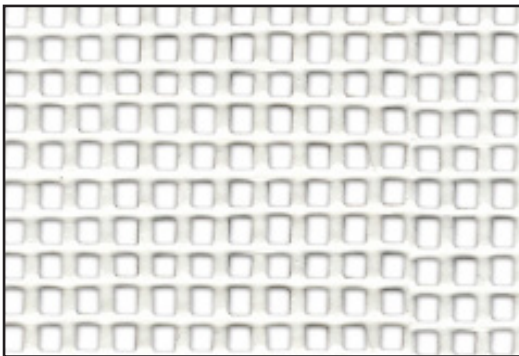

**White**

B3770-100

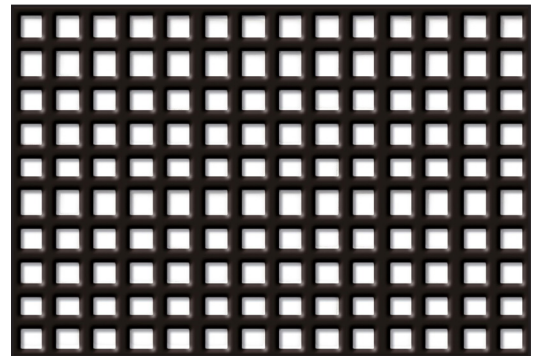

**Black**

B3770-101

# Frontside

## TXM-50

### Main applications

- Flexible Composite Facades
- Building Cladding
- Creative Tensile Structures

### Major advantages

- Superior Quality to Reduce Waste
- Excellent Ventilation

■ Technical Specifications		Standards
Yarn	Multifilament Polyester	DIN 60001
Coating	PVC	
Weight	16 oz/yd <sup>2</sup> 550 g/m <sup>2</sup>	DIN EN ISO 2286-2
Width	126 in. 320 cm	DIN EN ISO 2286-1

■ Physical properties		
Tensile Strength (warp/weft)	3000/3000 N/5 cm 337/337 lbf/in	DIN EN ISO 1421
Tear Resistance (warp/weft)	700/700 N 157/157 lbf	DIN 53363

> The technical data here above are average values with +/-5% tolerance

■ Flame retardancy		
Fire Resistance	<b>Pass</b>	NFPA 701, Method 2; ASTM E84; EN13501 B-s3,d0

> Other fire certificates available on demand

■ Light Properties		
Openness	50%	
Light Transmission	~50%	

■ Fabrication		
Weldability	High Frequency Weldable without Pre-Treatment	
Application	Tensile Facades	
Warranty	10 Years	

10-year  
warranty



The buyer of our products is fully responsible for their application and their transformation with regard to any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, workmanship and safety regulations in force in destination countries. For information on our contractual warranty, please refer to the relevant terms and conditions. The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to changes based on technical advances and we reserve the right to modify their characteristics at any time. The buyer of our products is responsible for checking the validity of the above data.

**Serge Ferrari**  
group

Serge Ferrari North America  
(954) 942-3600  
sergeferrari.com/us-en

